


## Technical Data Sheet

# Stainless Steel Strapping

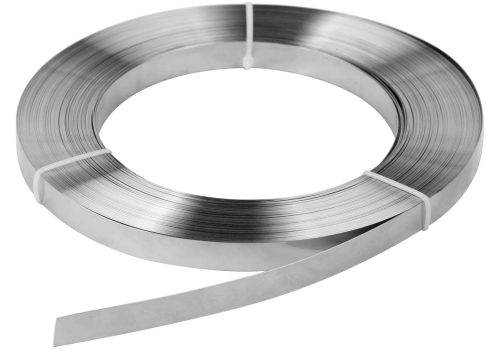

### Product Specifications

MSCP Stainless Steel Strapping is manufactured from T-304 stainless steel. Known for its superior strength and corrosion resistance, it's suitable for diverse applications.

The MSCP Stainless Steel Wing Seals feature a .032" thickness for maximum tensioning and binding power. These wing seals provide robust solutions for stainless steel strapping needs.

### Features

Standards: ASTM A-240  
 Thickness: .016, .020, .024  
 Width: 1/2", 5/8", 3/4"  
 Inner Diameter: 150mm, 200mm, 406mm  
 Weight Per Coil: 13.6kg, 27.22kg, 60kg  
 Grade: BA Shiny

### Material Specifications

#### Chemical Composition

	C	Si	Mn	P	S	Cr	Ni	Others
<b>SUS 316</b>	≤0.08	≤1.00	≤2.00	≤0.045	≤0.030	≤16.0-18.0	≤10.0-14.0	Mo:2-3
<b>SUS 304</b>	≤0.08	≤1.00	≤2.00	≤0.045	≤0.030	≤18.0-20.0	≤8.0-10.5	-

#### Stainless Steel Mechanical Properties

	YS(Mpa)	TS(Mpa)	EL(%)	Hv
<b>SUS 316</b>	≥205	≥520	≥40	≤200
<b>SUS 304</b>	≥205	≥520	≥40	≤200

